


# Product Datasheet

## Floor mounted unheated safety shower

HU-EXP-18G  
HU-EXP-18GS

This unheated floor standing emergency safety shower is a popular choice for many indoor applications to protect those workers subject to the risk of exposure to hazardous substances.

Designed to deliver a continuous controlled flow of water that meets the EN and ANSI standard of 76 litres per minute for a complete decontamination. With easy-grip pull rod activation, or optional foot treadle for hands-free operation, this shower can be activated in seconds to minimize injury.

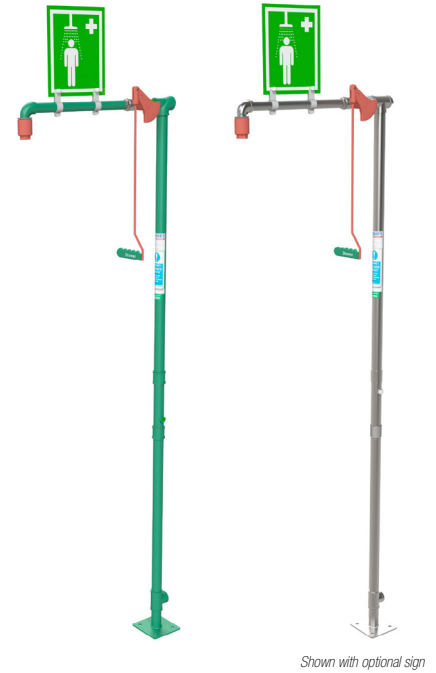

## Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel (GS) or galvanised mild steel (G)
OPERATING VALVE	Stainless steel, full bore, stay open valve
SHOWER NOZZLE	Injection moulded nylon 6
STANDARD FINISH	Polished brush (GS) or green powder coated (G)
SERVICES	
WATER INLET	1¼" female BSP
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	76 L per minute / 20 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER	Pull handle
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	150mm (5.9in) x 750mm (29.5in) x 2320mm (91.3in)
WEIGHT	12kg (26lb)



# General Arrangement Drawing

## Floor mounted unheated safety shower

HU-EXP-18G

HU-EXP-18GS

