


Product Datasheet

Floor mounted unheated safety shower with body spray

HU-EXP-20G
HU-EXP-20GS

Suited to indoor use, this general purpose floor mounted unheated emergency safety shower has the addition of a body spray at waist level to focus on drenching the lower parts of the body. The shower and body spray combined drench the casualty with 115 litres of water per minute to ensure a complete decontamination. Activation is fast and simple using the easy-grip pull rod, for hands-free operation an optional foot treadle is available.

Meets the requirements of EN15154 and ANSI Z358.1-2014.

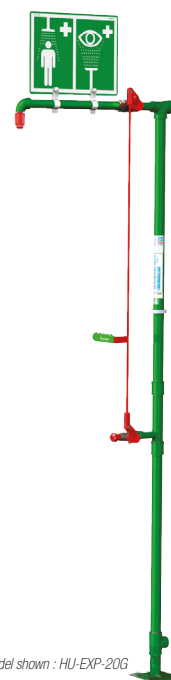

Model shown : HU-EXP-20G

Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel (GS) or galvanised mild steel (G)
OPERATING VALVE	Stainless steel, full bore, stay open ball valve
SHOWER NOZZLE	Injection moulded nylon 6
BODY SPRAY	uPVC
STANDARD FINISH	Polished brush (GS) or green powder coated (G)
SERVICES	
WATER INLET	1¼" female BSP
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	Shower/body spray combined: 115 L per minute / 30 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER/BODY SPRAY	Pull handle
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	150mm (5.9in) x 750mm (29.5in) x 2320mm (91.3in)
WEIGHT	16kg (35lb)



General Arrangement Drawing

Floor mounted unheated safety shower with body spray

HU-EXP-20G

HU-EXP-20GS

