



## SPECIFICATIONS

EU-SP11FC is a Soft-Flo ABS plastic anti-surge eyewash head in Safety Green, with a built-in 1.2 gpm (4.5 L) automatic pressure compensation flow control.

This assures a single, soft-and-steady stream of water for flowing water pressure ranging from 30 to 90 psi (2.1 to 6.2 bar).

Flow control is easily accessible for cleaning.


Supply: 1/4" NPT.



22 February, 2020  
DISCLAIMER: Continued product improvements make specifications subject to change without notice.

## NOTES

1. MODEL SP11FC IS DESIGNED FOR 1.2 GPM FLOW.
2. ASSEMBLY INSTRUCTIONS:
  - STEP 1. REMOVE OLD EYEWASH HEAD.
  - STEP 2. MAKE SURE THREADS ARE CLEAN.
  - STEP 3. SCREW ON NEW EYEWASH HEAD UNTIL HAND TIGHT. DO NOT USE PIPE SEALANT AS THIS COULD DAMAGE EYEWASH HEAD. TEFLON TAPE CAN BE USED BUT NOT REQUIRED.
  - STEP 4. TURN ON VALVE & CHECK FLOW PATTERN USING EYEWASH GAGE PER ANSI Z358.1.

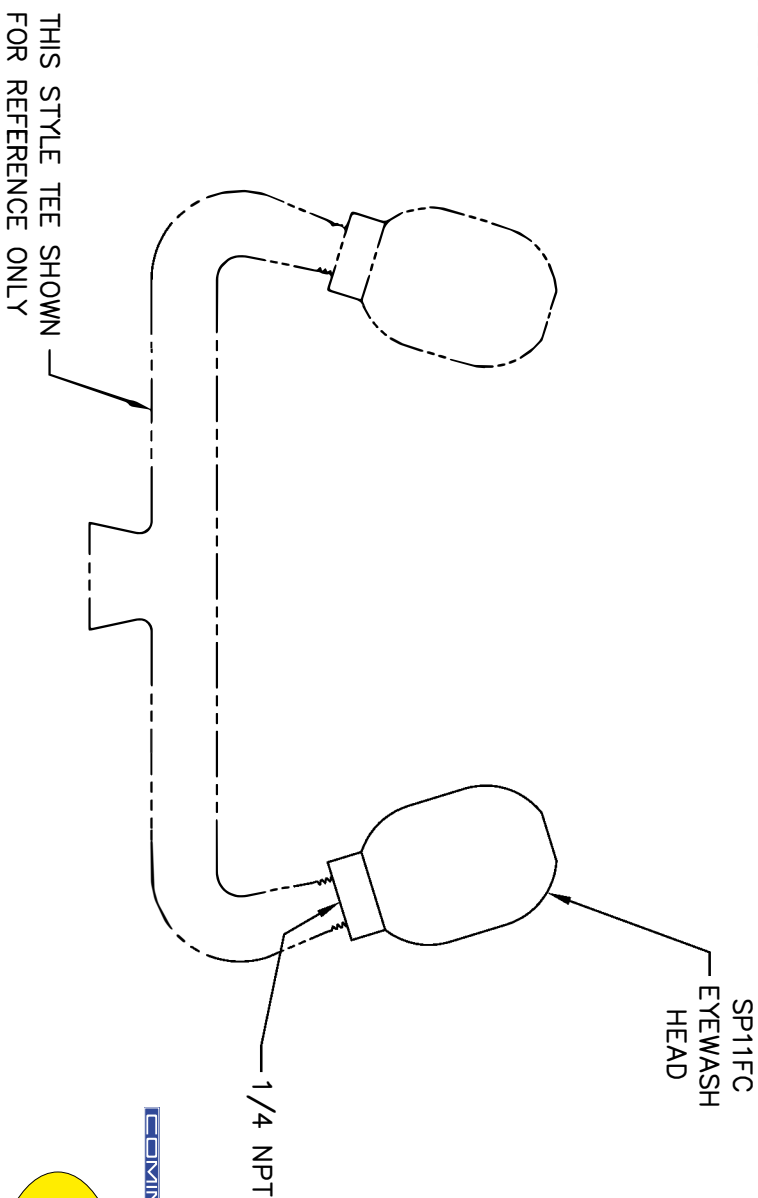

REVISED PART	BY	DATE	TITLE: EYEWASH HEAD, SP11FC	PART NUMBER:
ECN: 2880	RTM	10/00	MODEL: SP11FC	0002080391
BY: M. KULSKI			INFO FAX DOC # 2721132	DATE: 10/00
APPROVED:			SCALE: 1/2"	DRAWING TYPE: INSTALLATION/REWORK
				REV: 0
				SIZE: A 1 SH: 1 OF 1

DWG. NO. 14845A00